


| | | |
|----------------------------|----------------------|--------------------|
| Max load: | - lb | - kg |
| Volume: | .18 cord of 8 ft | .63 m ³ |
| Area tip to tip: | 2.80 ft ² | .26 m ² |
| Rotator lifting capacity: | 14000 lb | 6350 kg |
| Torque at relief pressure: | 8450 lb-in | 955 Nm |
| | 913 psi | 63 bars |
| Weight: | 820 lb | 372 kg |

| | | | | |
|---|----------------------------|----------|-------------------------|----------|
| Rotator | Maximum pressure: 5000 psi | 345 bars | Recommended flow: 8 gpm | 30 l/min |
| Rotator recommended flow will produce a maximum speed of 30 rpm | | | | |

| Cylinder | Diameter | Recommended pressure | Pressure range | Flow range | Lock valves |
|----------|-------------|----------------------|--------------------------------|--------------------------|-------------|
| Standard | 3 " (76 mm) | 3000 psi (207 bars) | 2500 - 3500 psi (172-241 bars) | 6 - 9 gpm (23-34 l/min.) | No |

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 6 seconds.

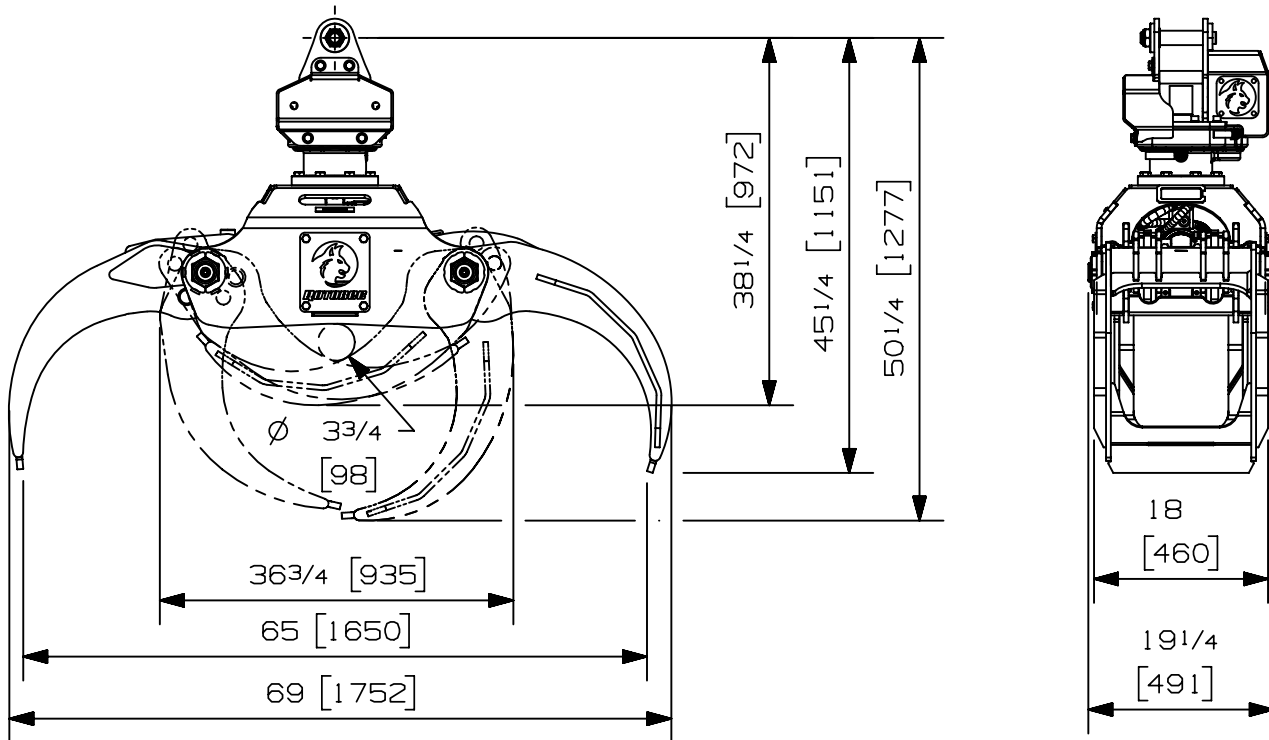

Options:

-
-
-
-

web site: www.rotobec.com

email: rotobec@rotobec.com

Rotobec Inc.: Head office serving OEM's and Eastern Canada Ph: (418) 383-3002 Fax: (418) 383-5334
 Rotobec West: Branch serving Western Canada and Western USA Ph: (250) 765-1161 Fax: (250) 765-0035
 Rotobec USA: Branch serving Eastern and Central USA Ph: (603) 444-2103 Fax: (603) 444-0327

We reserve the right to change specifications and to improve our products without notice or obligation.

07010-6601
20/04/20 J-M.L.