


Max load:	n/a lb	n/a kg
Volume:	.06 cord of 8 ft.	.22 m ³
Area tip to tip:	.97 ft ²	.09 m ²
Rotator lifting capacity:	25000 lb	11340 kg
Torque at relief pressure:	16150 lb-in 1450 psi	1825 Nm 100 bars
Weight:	755 lb	342 kg

Rotator	Maximum pressure: 5000 psi 345 bars	Recommended flow: 9 gpm 34 l/min
Rotator recommended flow will produce a speed of 30 rpm		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	3 1/2 " (89mm)	2350 psi (165 bars)	2000-2700 psi (138-186 bars)	13-19 gpm (49-72 l/min.)	no
Standard	3 " (76 mm)	3250 psi (224 bars)	2800-3700 psi (193-255 bars)	9-13 gpm (34-49 l/min.)	no

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 4 seconds.

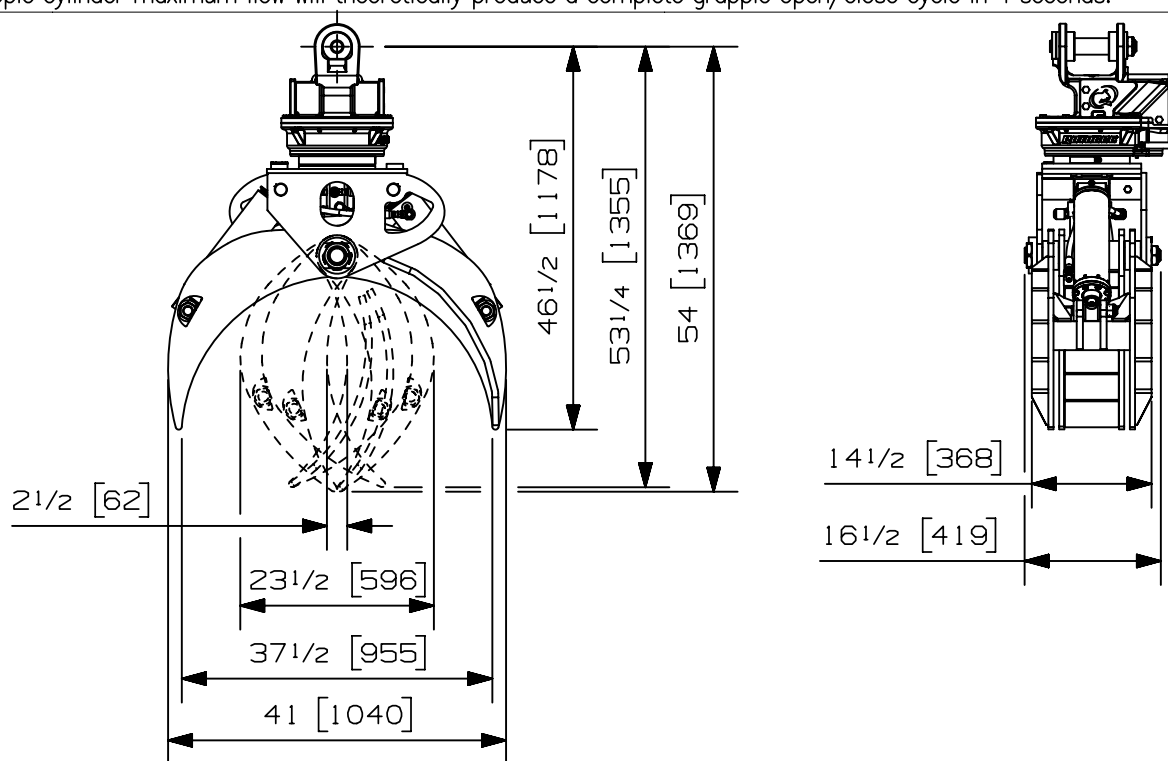

- Options:
- Head protector. (27 lb / 12 kg)
 - Log protection package, including shaft on jaw tips and protection strips on jaw edges. (n/a)
 - Shaft on jaw tips to prevent log damage. (n/a)
 - Impact protection relief valve. (10 lb / 5 kg)

web site: www.rotobec.com

email: rotobec@rotobec.com

Rotobec Inc.: Head office serving OEM's and Eastern Canada Ph: (418) 383-3002 Fax: (418) 383-5334
Rotobec West: Branch serving Western Canada and Western USA Ph: (250) 765-1161 Fax: (250) 765-0035
Rotobec USA: Branch serving Eastern and Central USA Ph: (603) 444-2103 Fax: (603) 444-0327

We reserve the right to change specifications and to improve our products without notice or obligation.

07008-2849
12/09/18 D.L.