


<b>Max load:</b>	n/a lb	n/a kg
<b>Volume:</b>	.39 y <sup>3</sup>	.30 m <sup>3</sup>
<b>Area tip to tip:</b>	n/a ft <sup>2</sup>	n/a m <sup>2</sup>
<b>Rotator lifting capacity:</b>	100000 lb	45359 kg
<b>Torque at relief pressure:</b>	21770 lb-in 913 psi	2460 Nm 63 bars
<b>Weight:</b>	2140 lb	971 kg

<b>Rotator</b>	<b>Maximum pressure:</b> 4200 psi    290 bars	<b>Recommended flow:</b> 6 gpm    23 l/min
Rotator recommended flow will produce a speed of 10 rpm		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	3 1/2 " (89 mm)	4300 psi (296 bars)	3600-5000 psi (248-345 bars)	9-13 gpm (34-49 l/min.)	no

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 4 seconds.

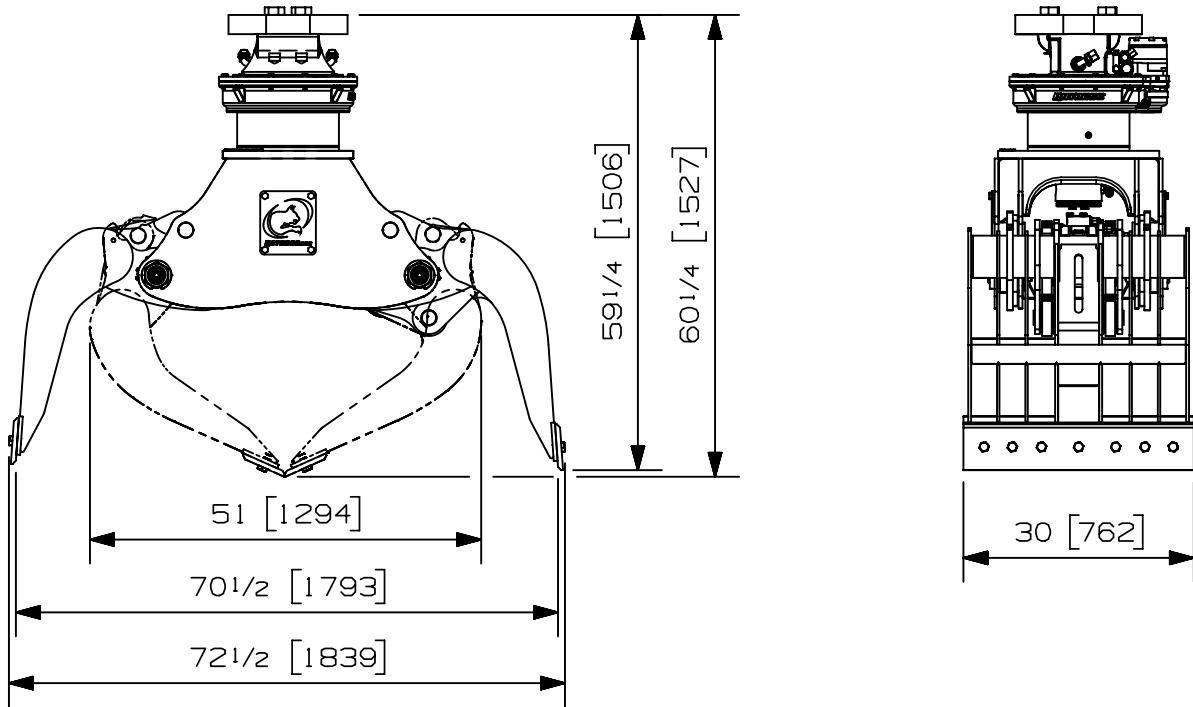

**Options:**

- See also RGP-1002 option for more options
- 
- 
- 

web site: [www.rotobec.com](http://www.rotobec.com)

email: [rotobec@rotobec.com](mailto:rotobec@rotobec.com)

**Rotobec Inc.:** Head office serving OEM's and Eastern Canada    Ph: (418) 383-3002 Fax: (418) 383-5334  
**Rotobec West:** Branch serving Western Canada and Western USA    Ph: (250) 765-1161 Fax: (250) 765-0035  
**Rotobec USA:** Branch serving Eastern and Central USA    Ph: (603) 444-2103 Fax: (603) 444-0327