




**ROTOBEC™**

# Log grapple

## 6058HD with rotator RT-504

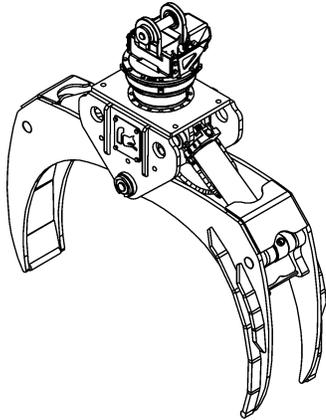

<b>Opening</b>	58 3/8 in. (1483 mm)
<b>Closing</b>	6 1/8 in. (156 mm)
<b>Volume</b>	.317 cord of 8 ft. wood
<b>Area tip to tip</b>	5.1 sq. ft. (.47 sq. meter)
<b>Rotator lifting capacity</b>	50000 lb (22680 kg)
<b>Torque at relief pressure</b>	18630 in.lb (2105 Nm) @ 1450 psi (100 bars)
<b>Steel* thickness</b>	1" (25 mm)
<b>Weight</b>	1800 lb (816 kg)



\*High tensile strength steel: 165,000 psi (1138 MPa)

<b>Rotator</b>	<b>Maximum pressure:</b> 5000 psi (345 bars)	<b>Recommended flow:</b> 9 gpm (34 l/min.)
Rotator recommended flow will produce a speed of 25 rpm.		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	4" (102 mm)	3000 psi (207 bars)	2500 - 5000 psi (172 - 345 bars)	22 - 33 gpm (83 - 125 l/min.)	yes

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 5 seconds.

Reference	Dimension
A	6 1/8 in. (156 mm)
B	58 3/8 in. (1483 mm)
C	70 in. (1778 mm)
D	70 1/4 in. (1784 mm)
E	10 1/2 in. (267 mm)
F	17 1/2 in. (445 mm)
G	20 1/2 in. (521 mm)
H	

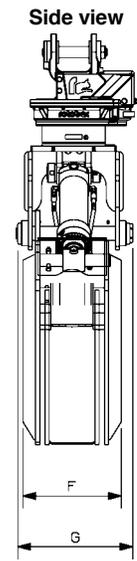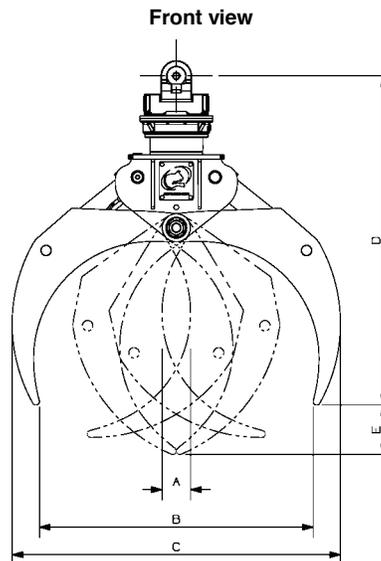

OPTIONS: Log protection package, including shaft on jaw tips and protection strips on jaw edges. Jaw tip modification to prevent log damage (available on heavy-duty models, standard on super-heavy-duty models). Impact protection relief valve.

web site: [www.rotobec.com](http://www.rotobec.com)

e-mail: [rotobec@rotobec.com](mailto:rotobec@rotobec.com)

Rotobec Inc.: Head office serving OEM's and Eastern Canada  
 Rotobec West: Branch serving Western Canada and Western USA  
 Rotobec USA: Branch serving Eastern and Central USA

Ph: (418) 383-3002 Fax: (418) 383-5334  
 Ph: (250) 765-1161 Fax: (250) 765-0035  
 Ph: (603) 444-2103 Fax: (603) 444-0327