


Max load:	- lb	- kg
Volume:	.22 cord of 8 ft	.82 m ³
Area tip to tip:	3.60 ft ²	.33 m ²
Rotator lifting capacity:	60000 lb	27216 kg
Torque at relief pressure:	29694 lb-in	3355 Nm
	1450 psi	100 bars
Weight:	1820 lb	826 kg

Rotator	Maximum pressure: 5000 psi 345 bars	Maximum flow: 8 gpm 32 l/min
Rotator recommended flow will produce a maximum speed of 15 rpm		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	3 " (76 mm)	4300 psi (296 bars)	3600 - 5000 psi (248-345 bars)	10 - 15 gpm (38-57 l/min.)	No
Standard	3 1/2 " (89 mm)	3000 psi (207 bars)	2500 - 3500 psi (172-241 bars)	14 - 21 gpm (53-79 l/min.)	No

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 4 seconds.

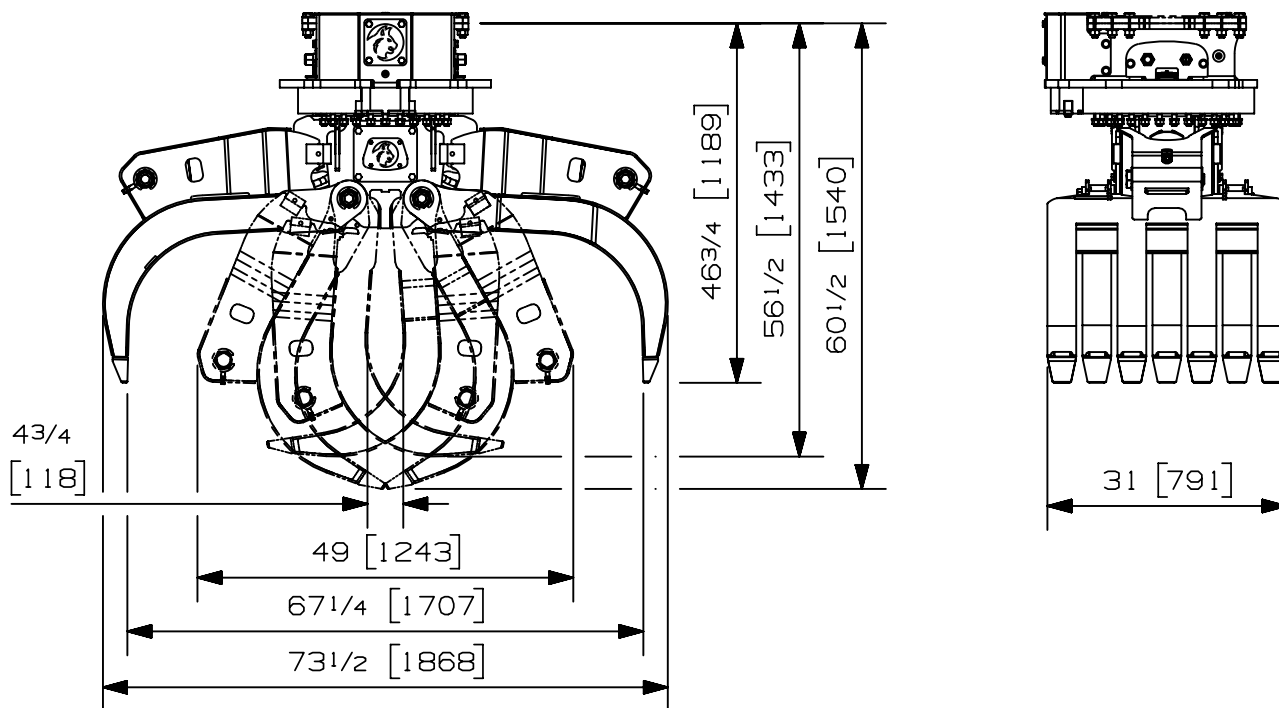

Options:

- CounterBalance valve option (9 lbs / 4 kg)
- Mini heel set (22 lbs / 10 kg)
- See also RLP-602 option for more options

web site: www.rotobec.com

email: rotobec@rotobec.com

Rotobec Inc.: Head office serving OEM's and Eastern Canada Ph: (418) 383-3002 Fax: (418) 383-5334
Rotobec West: Branch serving Western Canada and Western USA Ph: (250) 765-1161 Fax: (250) 765-0035
Rotobec USA: Branch serving Eastern and Central USA Ph: (603) 444-2103 Fax: (603) 444-0327